

Liverpool Development Control Plan 2008
Part 3.4
Semi-Detached and Attached
Dwellings (Duplexes and Terraces)
in the R2, R3 and R4* zones

August 2026

Part **3.4** must be read in conjunction with Part 1

Check if any Locality Parts also apply
*R4 permits Attached Dwellings

Part 3.4 Semi-Detached and Attached Dwellings (Duplexes and Terraces) in the R2, R3 and R4* zones

1 Preliminary

Applies to

1. Part 3.4 applies to Semi Detached and Attached Dwellings on land in the R2 – Low Density Residential, R3 - Medium Density Residential, under the Liverpool LEP 2008 except as provided below.
2. Part 3.4 also applies to Attached Dwellings on land in the R4 – High Density Residential zone, under the Liverpool LEP 2008.
3. Part 1.1 and 1.2 applies to the land.
4. The following Parts also apply to development in certain areas these Parts only provide controls for the Public Domain, in particular the proposed street layout.
 - Part 2.1 Casula Green Valley.
 - Part 2.2 Hoxton Park, Carnes Hill and Prestons.
5. Part 3.4 does not apply to residential development on land in the residential zones in the following locations. All controls in relation to the Private and Public Domain are covered by the respective parts.
 - Georges Fair Moorebank. (Refer to Part 2.3 for all controls on residential development).
 - Middleton Grange. (Refer to Part 2.5 for all controls on residential development).
 - Greenway Views. (Refer to Part 2.7 for all controls on residential development).
 - Voyager Point (Refer to Part 2.8 for all controls on residential development).
 - Moorebank East (Refer to Part 2.10 for all controls on residential development).
 - Development on Congressional Drive (Refer to Part 2.12 for all controls on residential development).
 - Edmondson Park (Refer to Part 2.11 for all controls on residential development).
6. This section applies to development involving the erection of 2 dwellings either on 2 existing lots or on a single lot, which could be subdivided, so that each dwelling is on a separate lot, either strata or Torrens Title subdivision in the R2 & R3 zones.

Background

Semi-detached and attached dwelling housing is a form of small dwellings. They can be built on vacant lots in certain release areas or on existing sites in established areas.

Link to Liverpool LEP 2008

Liverpool LEP 2008 provides overall requirements and objectives for development in the residential areas of Liverpool. It does not just cover residential development but also non-residential development in residential areas.

Each zone provides objectives, which provide direction for the controls in the DCP. There are also general provisions for development in the residential zones as well as provisions for specific forms of development in the residential areas or for development on specific sites.

Objectives

- a) To provide controls for residential development to ensure that it achieves a high standard of urban design, that is compatible with the amenity and character of the area.
- b) To provide for a variety of housing choice within residential areas with Liverpool.

2 Site Planning


Objectives

- a) To ensure that Semi-detached dwellings and Attached dwellings are designed around the site attributes, such as streetscape character, natural landform, existing vegetation, land capability slope, solar access and, if relevant, heritage items.
- b) To ensure privacy for residents and neighbours.

Controls

- 1. The layout of the Semi-detached dwellings and Attached dwellings must be designed around the sites attributes such as slope, existing vegetation, land capability and/or solar access.
- 2. There must be a direct link from at least one living area to the principal private open space area.
- 3. The siting of windows of habitable rooms on the first floor must not overlook neighbouring properties.
- 4. Stormwater from the site must be able to be drained satisfactorily. Where the site falls away from the street, it may be necessary to obtain an easement over adjoining property to drain water satisfactorily to a Council stormwater system. Where stormwater drains directly to the street, there may also be a need to incorporate on-site detention of stormwater where street drainage is inadequate. Refer to Water cycle management in Part 1.1.

Figure 1 Site planning for Semi-detached dwellings and Attached dwellings

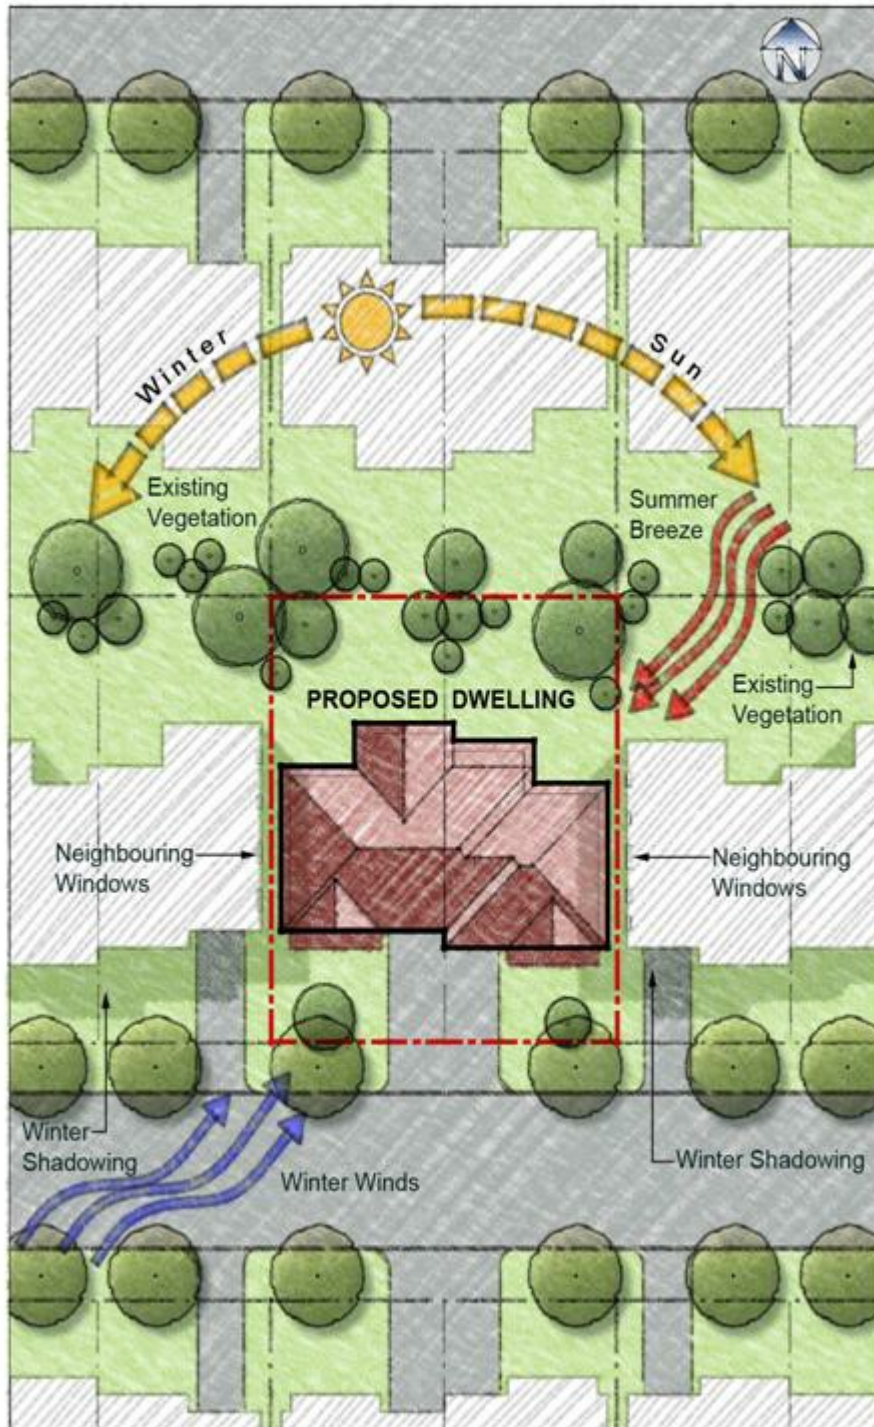

3 Setbacks

Setbacks

Objectives

- To set dwellings back from the street and adjacent properties to provide reasonable space for landscaping, private open space and solar access.
- To set dwellings back from each other to provide visual and acoustic privacy.
- To create a streetscape that provides a desirable and safe environment.

- d) To establish a streetscape of a scale and sense of enclosure appropriate to the locality.
- e) To provide an appropriate area capable of allowing the growth of trees and shrubs.

Controls

1. Semi-detached dwellings and Attached dwellings shall be setback in accordance with Table 1.

Table 1

Road	Front Setback	Secondary Setback
Classified Roads	7.0 m	7.0 m
Other Streets (ground floor)	4.5 m	2.5 m
Other Streets (first floor)	5.5 m	2.5 m

2. Garages must be set back a minimum of 1m behind the main face of the dwelling (see Figure 2). (The main face is the first wall of a habitable room)
3. Verandahs, balconies, eaves and other sun control devices may only encroach on the minimum primary and secondary setback by up to 1m.
4. The secondary setback is the longest length boundary (See Figure 2).
5. Garages that address the secondary frontage must have minimum setback of 5.5m.

Side and Rear Setbacks

6. Buildings shall be setback from the side and rear boundaries in accordance with Table 2.

Table 2


Item	Side Setback	Rear Setback
Single storey buildings	0.9 m	4.0 m
Second storey component of buildings	1.2 m	7.0 m
Living room doors (such as family, dining or rumpus rooms)	4.0 m	4.0 m

Note: Building encroachments may only occur if it is seen as beneficial for open space, solar access and the internal layout of the dwelling. The dwellings living areas should open out to open space.

Note: In a terrace style attached dwelling development the side setbacks do not apply to the middle terraces, only the end two terraces.

7. Garages that address the secondary frontage must have minimum setback of 5.5m.

Figure 2 Front and Rear Setbacks

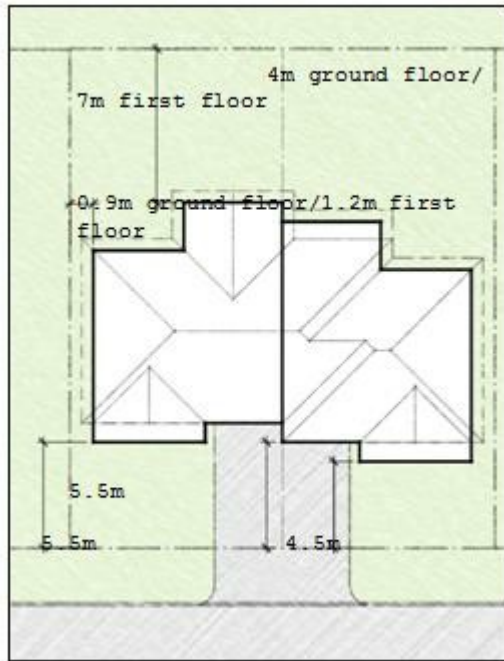

8. Garages may only be built to the zero lot line if:
- An easement for access and maintenance of no less than 900mm wide must be created adjacent to the proposed zero lot on the adjoining property. Written consent from the adjoining owner(s) for the creation of any easements must be submitted as part of the development application.
 - The lot has a cross slope not exceeding 5%.
 - The zero lot line is situated on the down slope (filled) side of the lot and not on the up-slope (excavated) side.
 - Construction meets the Fire Resistance level requirements of the Building Code of Australia, with no windows along the zero lot line.
 - Piers to a minimum depth of 500mm are to be provided beneath the wall structure on the zero lot line.
 - Zero lot line construction is permissible only on one side boundary of the lot, with a minimum setback of 1.2m to be observed to the opposite boundary.
 - A zero lot line wall shall have select face brickwork, rendered or similar finish.
 - Fencing is not to be constructed immediately adjacent to the zero lot line as this may aid the access of termites into the dwelling.
 - It can be demonstrated that the zero lot line wall will have a similar impact on the solar access to the adjoining lot to that of a wall setback 900mm from the boundary.
 - The zero lot line wall will not have an adverse impact on the streetscape.
 - Where a garage is to be situated on the zero lot line, the garage shall have a physical barrier termite treatment (*Note: chemical treatments cannot be used, as this requires perimeter spraying on the adjoining lot*).

4 Landscaped Area and Private Open Space

Landscaped area and Private Open Space are defined in *Liverpool LEP 2008*.

Principal Private Open Space is an area that is directly accessible from at least one living room and is included in the private open space calculations (the Principal Private open space area may be paved or sealed).

Landscaped Area

Objectives

- a) To provide an area to allow vegetation to mature.
- b) To reduce the impact to neighbouring properties and natural waterways from stormwater runoff.
- c) To reduce the amount of impervious areas.
- d) To enhance the existing streetscape and soften the visual appearance of the dwellings.
- e) To maximise the amount of landscaped area within the front setback of the dwellings.

Note: All proposed developments require a landscape plan to be submitted with the development application.

Controls

- 1. A minimum of 20% of the site area shall consist of Landscaped Area, this may include lawn, deep rooted trees, garden beds and mulched areas.
- 2. A minimum unincumbered area of 4 x 6m shall be provided in rear setback to accommodate deep rooted trees.
- 3. A minimum of 50% of the front setback area shall be Landscaped Area.
- 4. A minimum unincumbered area of 3 x 5m shall be provided in front setback to accommodate deep rooted trees.

Private Open Space

Objectives

- a) To ensure that a minimum amount of Private Open Space is provided for outdoor activities and Principal Private Open Space areas are located adjacent to internal living areas.
- b) To ensure that Private Open Space is clearly defined for private use.
- c) To ensure that Private Open Space is private, landscaped, screened from overlooking and receives an adequate amount of solar access.
- d) To ensure that existing or proposed buildings do not overshadow Private Open Space.

Controls

- 1. The Private Open Space for each dwelling must have a minimum area of 60m².
- 2. Areas less than 2.5 m in width does not qualify as Private Open Space.
- 3. Private Open Space areas are not permitted within the primary street setbacks.
- 4. Private Open Space must have an area for clothes drying with at least 2 hours of full sun between 9.00am and 5.00pm at 21 June.
- 5. The Private Open Space shall include a Principal Private Open Space area, which is directly accessible from the main living area of a dwelling with a minimum dimension of 4 x 6m.
- 6. The principal private open space must receive 3 hours of sunlight to at least 50% of the area between 9:00am and 5:00pm on 21 June.
- 7. Where the Principal Private Open has a predominately northern aspect Clause 6 (above) does not apply.

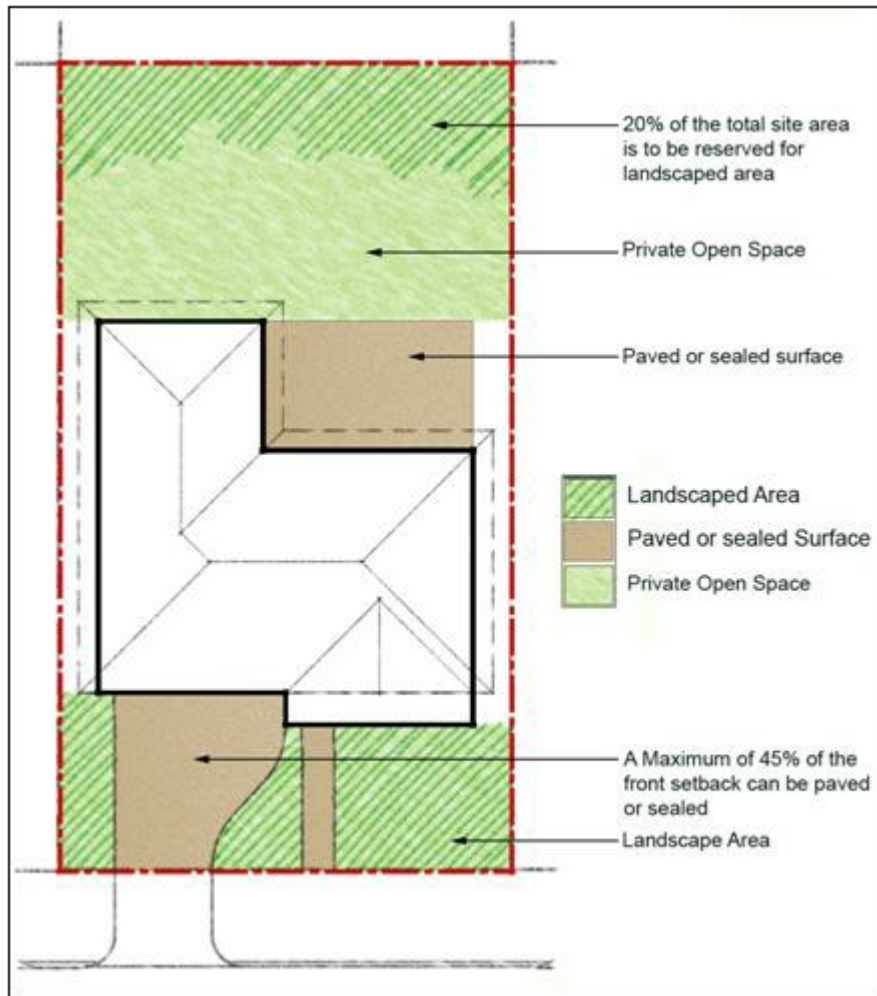


Figure 3 An example of Landscaped Area and Private Open Space.

5 Cut and Fill, Building Design, Streetscape and Layout

Cut and Fill of Land

Objectives

- To reduce the incidence of change in natural ground levels.
- To encourage the architectural designs of dwellings which suit the contours of the land.
- To provide controls for cut and fill of land designed to minimise the incidence of soil erosion and subsequent sedimentation of waterways.
- To ensure that development on adjoining properties is not threatened or prejudiced by proposed cut and fill practices.
- To discourage and eliminate, where possible, the construction of retaining walls on allotment boundaries.
- To minimise overshadowing of neighbouring dwellings, their private open space or any solar panelling.

Controls

- The maximum cut on a site must not exceed 600mm.
- All retaining wall structures shall be masonry construction and designed by a suitably qualified

person, or constructed as specified by the manufacture of the product. The retaining wall shall be constructed wholly inside (within) the boundary of the site.

3. All slab constructions for dwellings that are above natural ground level are to be constructed using dropped edge beams to retain fill. The maximum fill within the confines of the slab must not exceed 1 m. All fill must be contained within the dwelling footprint.
4. Contaminated fill, either imported or found on site is not permitted.
Note: In the event of approval being granted to the erection of retaining wall(s) to contain proposed cut, Council will require the completion of such retaining wall(s) PRIOR TO the release of the occupation certificate.
5. Where an applicant considers that an allotment has characteristics which warrant exemption from this policy, an application for exemption may be made by the submission of a development application to Council for consideration. In addition to normal requirements the submission should include:
 - A plan showing existing contours (at 0.5m intervals) of the subject site and all adjoining sites;
 - A plan showing future contours (after proposed cut and fill) of the subject site and all adjoining sites; and
 - Full details of any proposed retaining wall(s).Note: In the event of approval being granted to the erection of retaining wall(s) to contain proposed cut and fill, Council will require the completion of such retaining wall(s) PRIOR TO the commencement of any building works.

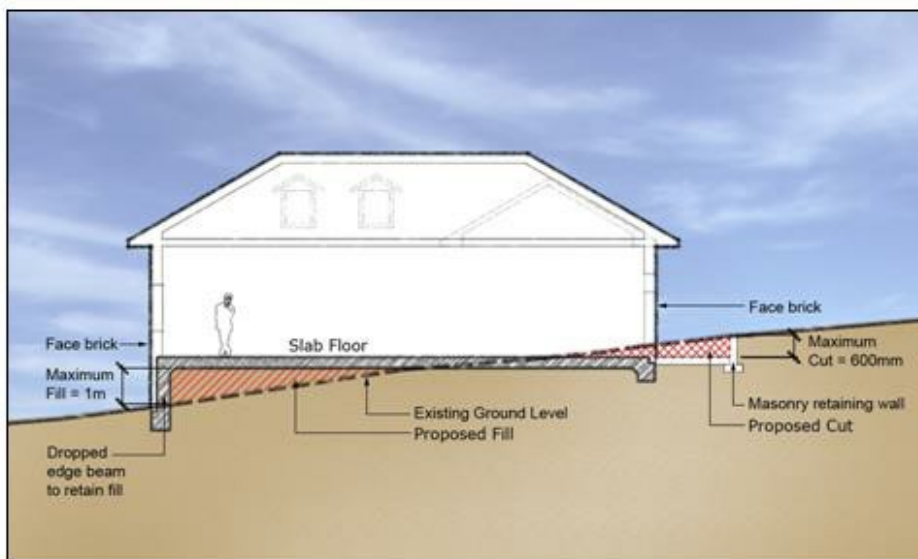


Figure 4 Cut and fill

Building Design and Appearance

Objectives

- a) To encourage designs that will enhance the character of the neighbourhood.
- b) To promote variation of building facade and design.
- c) To ensure that the building enhances the streetscape through the use of suitable built form design and landscaping.
- d) To ensure buildings address all street frontages appropriately.
- e) To discourage garages and in particular garage doors, from visually dominating the streetscape.
- f) To ensure that the building design, detailing, colour and finish shall add visual interest to the

street and shall compliment the street.

- g) To ensure habitable rooms address the street.
- h) To encourage balconies over garages on two storey dwellings.

Controls

1. All dwellings are to be orientated to the street.
2. The front pedestrian entrance must be visible from the street.
3. The front building facades shall be articulated. The façade should incorporate front porches, entries, pergolas and verandahs on front facades.
4. Eave overhang must provide for sun shading and protect windows and doors. Eaves should have a minimum overhang of 400mm and be provided to a minimum of 70% of the dwelling.
5. Semi-detached dwellings or Attached dwellings proposed on a corner allotment shall address both frontages by the use of verandahs, balconies, windows or similar modulating elements.
6. “Mirror – imaging” of facades on a Semi-detached dwellings and Attached dwellings are not permitted.
7. The front building line of semi-detached dwellings must be staggered by a minimum of 1m. (See Figure 5)



Figure 5 An example of a Staggered building line for a semi-detached dwelling



Figure 6 Typical building line and style for an attached dwelling

Two storey dwellings

8. For two storey developments, a side wall must be articulated if the wall has a continuous length of over 10m.
9. On two storey dual occupancies, balconies are encouraged to face the street or built over garages.
10. Balconies are not permitted on the first floor of the side and / or rear portion of the dwelling. Balconies may be considered if they address public open space / utilities.

Garages and Carports

11. Garages and carports must be designed to be the minor element of the façade.
12. The maximum width of garage doors or carports must be no greater than 50% of the building frontage width.
13. Garage roofs shall be incorporated into the roof design of the house. Separate roofs for garages should be discouraged, unless actually separated from the dwelling.
14. Garages and carports are to be compatible with the building design in terms of height, roof form, detail, materials and colours.
15. The conversion of garages to living space may only be permitted if:
 - At least one car parking space is provided behind the front setback.
 - The additional living area does not result in the building exceeding the maximum permitted floor space ratio.

Internal Design of Attached Dwellings

Objectives

- a) The internal design must contribute to personal safety and to the protection of property by permitting casual surveillance of public spaces from private windows and entries.
- b) To provide passive surveillance from rooms addressing the street or any adjoining open space.

- c) To encourage the internal design of the dwelling to take advantage of cross ventilation.
- d) To locate amenity rooms (such as laundries, bathrooms, toilets) to the side and rear of the development.
- e) That each dwelling shall provide a sufficient amount of storage for elements such as garden and sports equipment.

Controls

- 1. All dwellings shall have habitable rooms located to the front of the dwelling for security and surveillance to the street.
- 2. Where possible, living rooms should take advantage of northern aspects.
- 3. Access to private open space must be from at least one living room.
- 4. The internal layout of the dwelling is encouraged to incorporate cross ventilation.
- 5. Bathrooms, ensuites, laundries and walk in wardrobes should be located to the side or rear of the dwelling.
- 6. Each dwelling of the semi-detached and attached dwelling must provide a minimum storage area of 8m³.
- 7. Locate active use rooms or habitable rooms with windows overlooking communal/public areas (e.g. playgrounds, gardens).

Figure 7 Example of Semi-Detached Dwellings



Figure 8 Example of Attached Dwellings



6 Landscaping and Fencing

Landscaping

Objectives

- a) To retain existing mature trees within the site in a way, which ensures their ongoing health and vitality.
- b) To provide privacy, summer shade and allow winter sun.
- c) To enhance the existing streetscape and visual appearance of dwellings.
- d) To encourage landscaping that is appropriate to the natural, cultural and heritage characteristics of its locality.
- e) To ensure the visual impact of development is minimised and integrated into the streetscape.

Note: All proposed developments require a landscape plan written by a qualified landscape architect is to be submitted with the development application.

Controls

- 1. The setback areas of development are to be utilised for canopy tree planting. The landscape design for all development must include canopy trees that will achieve a minimum 8 m height at maturity within the front and rear setback areas.
- 2. Landscape planting should be principally comprised of native species to maintain the character of Liverpool and provide an integrated streetscape appearance. Species selected in environmentally sensitive areas should be indigenous to the locality. However, Council will consider the use of deciduous trees in small private open space areas such as courtyards for control of local microclimate and to improve solar access.
- 3. The landscaping shall contain an appropriate mix of canopy trees, shrubs and groundcovers. Avoid medium height shrubs (600 – 1800mm) especially along paths and close to windows and

doors.

4. Landscaping in the vicinity of a driveway entrance should not obstruct visibility for the safe ingress and egress of vehicles and pedestrians.
5. Tree and shrub planting along side and rear boundaries should assist in providing effective screening to adjoining properties. The minimum height of screening to be provided is 2.5 to 3m at maturity.
6. The development must be designed around significant vegetation on the site.
Note: It is important to retain significant vegetation to maintain an existing streetscape and enhance the visual appearance of new dwellings.
7. At least one tree shall be planted in the landscaped area. The tree must reach a mature height of over 8m.
8. Trees adjacent to private open space areas and living rooms should provide summer shade and allow winter sun entry.
9. Any tree with a mature height over 8m should be planted a minimum distance of 3m from the building or utility services.
10. A landscape plan must be submitted to Council with the development application. Refer to Part 1.1 of the DCP.

Fencing

Objectives

- a) To provide a clear transition between public and private areas.
- b) To provide a visual element within the streetscape.
- c) To ensure fencing enhances the streetscape.

Controls

Primary Frontage

1. The maximum height of a front fence is 1.2m.
2. The front fence may be built to a maximum height of 1.5m if the fence is setback 1m from the front boundary with suitable landscaping in front of the proposed fence.
3. Fences should not prevent surveillance by the dwelling's occupants of the street or communal areas.
4. The front fence must be 30% transparent.
5. Front fences shall be constructed in masonry, timber, metal pickets and/or vegetation and must be compatible with the proposed design of the dwelling.
6. The front fence may be built to a maximum of 1.8m only if:
 - The primary frontage is situated on a Classified Road.
 - The fence is articulated by 1m for 50% of its length and have landscaping in front of the articulated portion.
 - The fence does not impede safe sight lines from the street and from vehicles entering and exiting the site.


Secondary Frontage

7. Fences and walls must be a maximum of 1.8m in height, and constructed of masonry, timber and/or landscaped (See Figure 8).
8. For side walls or fences along the secondary frontage, a maximum height of 1.2m is required for the first 9m measured from the front boundary, the remaining fence / wall may then be raised to a maximum of 1.8 m (see Figure 8). The secondary setback is the longest length boundary.

Boundary Fences

9. The maximum height of side boundary fencing within the setback to the street is 1.2 m.
10. Boundary fences shall be lapped and capped timber or metal sheeting.

Figure 9 Fence treatment on secondary frontage

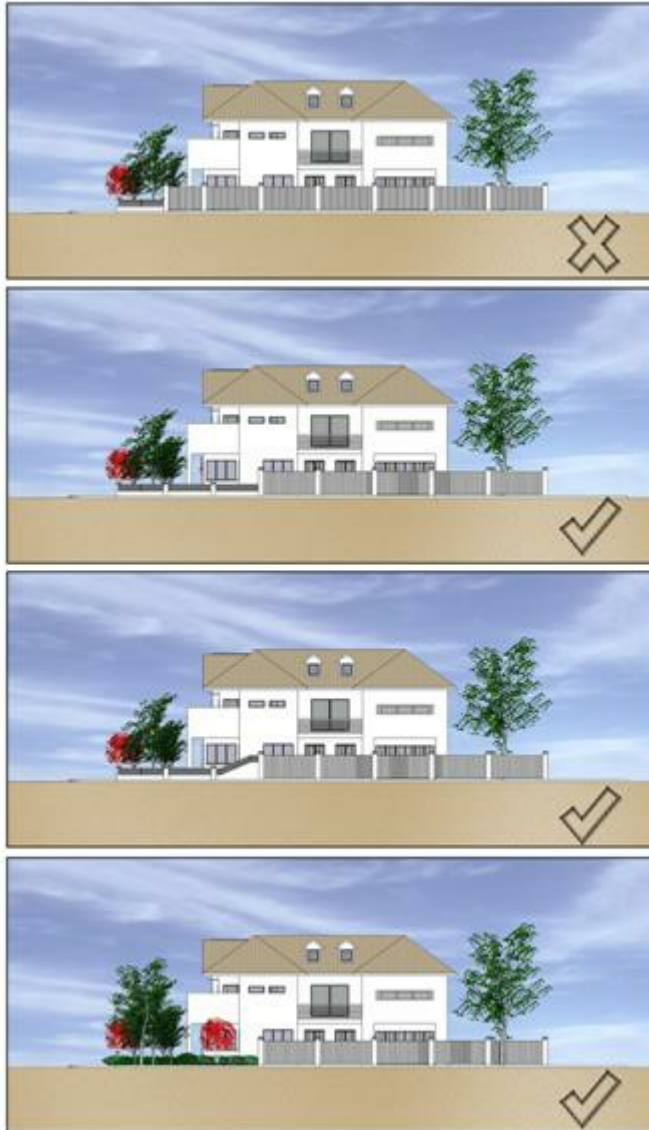

7 Car Parking and Access

Objectives

- a) To provide car parking facilities on site that are convenient, safe and have sufficient space for vehicular manoeuvrability, whilst being visually unobtrusive.
- b) To minimise the need on street parking from new dwellings.

Controls

1. Two car parking spaces shall be provided for each dwelling.
2. One space per dwelling is permitted in front of the setback from the street frontage.
3. A car parking space is to be a minimum dimension of 2.5 x 5.5m.

4. A single garage is to be a minimum of 3 m wide internally and unobstructed.
5. Kerbs shall be provided along the edge of all internal driveways.

8 Amenity and Environmental Impact

Overshadowing

Objective

To minimise overshadowing of neighbouring dwellings and their private open space.

Controls

Adjoining properties must receive a minimum of three hours of sunlight between 9am and 5pm on 21 June to at least:

- One living, rumpus room or the like.
- 50% of the private open space.

Privacy


Objective

To site and design buildings in a manner which protects the visual privacy of adjoining dwellings and their private open space.

Controls

1. Habitable room windows facing side boundaries are to be offset by at least 1m from any habitable room windows in an adjoining dwelling.
2. Habitable room windows on the first floor that face the side boundary are to avoid unreasonable overlooking by having a minimum sill height of 1.5m, except where they face a street or public open space (see Figure 9).
3. Building siting, window location, balconies and fencing must consider the importance of the privacy of on site and adjoining buildings and private open spaces.
4. Landscaping should be used where possible to increase visual privacy between dwellings and adjoining properties.

Figure 10 Privacy and Amenity

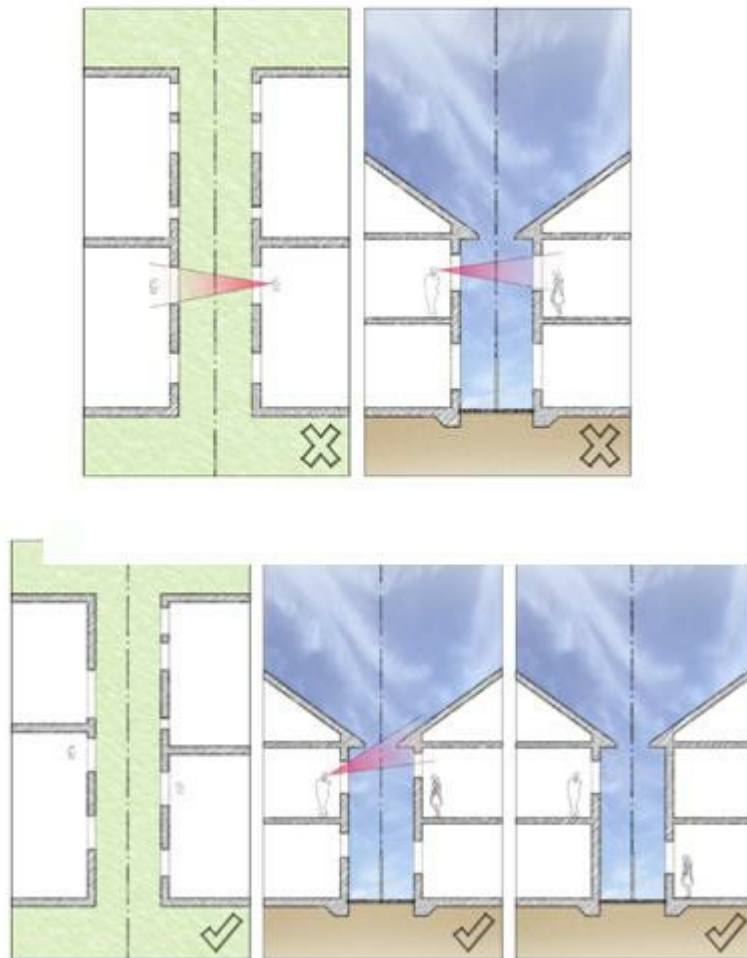

Acoustic Privacy

Objective

To ensure appropriate noise and vibration attenuation measures are incorporated into residential development.

Controls

1. Noise attenuation measures should be incorporated into building design to ensure acoustic privacy between on-site and adjoining buildings.
2. Developments in areas adversely impacted upon by rail or traffic related noises must incorporate the appropriate noise and vibration mitigation measures into the design in terms of the site layout, building materials and design, orientation of the buildings and location of sleeping and recreation areas.
3. Where party walls are provided they must be carried to the underside of the roof and be constructed in accordance with Part F5 of the *Building Code of Australia*.
4. The proposed buildings must comply with the Environment Protection Authority criteria and the current relevant Australian Standards for noise and vibration and quality assurance

9 Site Services

Objectives

- a) To ensure that the required services are provided.

- b) To ensure that the services provided are easily protected or maintained.

Controls

Letterboxes

1. Letterboxes shall to be provided for each dwelling on site, easily accessible from the street, able to be securely locked and provided in accordance with Australia Post's requirements.
2. Freestanding letterbox structures should be designed and constructed of materials that relate to the main building.
3. Residential numbering should be attached to the letterbox so that it is clearly visible from the street frontage. Numbers should be 75mm in height, reflective and in contrast to the backing material.

Frontage works and damage to Council infrastructure

4. Where a footpath, road shoulder or new or enlarged access driveway is required to be provided this shall be provided at no cost to Council.
5. Council must be notified of any works that may threaten Council assets. Council must give approval for any works involving Council infrastructure.
6. Where there are no existing street trees in front of the site and contributions have not been collected for street tree planting it may be a condition of consent that street trees be provided in the footpath area immediately in front of the site.

10 Secondary dwellings (Granny Flats)

Secondary dwellings are not permitted with Semi-detached dwellings and Attached dwellings.